


The specification of AL-UG23

Picture:

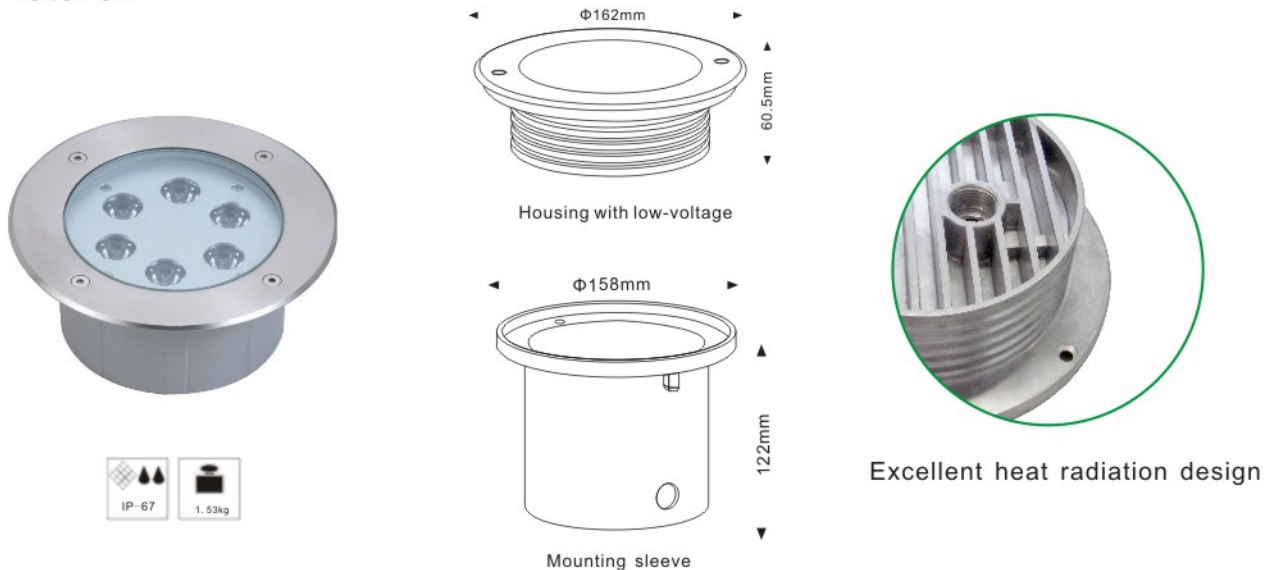

Parameter Descriptions

Item NO.	Light Source	Beam Angle	Consumption	Input Voltage	Color
AL-UG23-6E1	6x1W	30°	8.5W	24VDC	R/G/B/Y/W/WW
AL-UG23-6E3	6x3W	30°	13.0W	24VDC	R/G/B/Y/W/WW
AL-UG23-6E3F	6x3W RGB 3in1	25°/ 45°	22W	24VDC	RGB 3in1

Specification

Housing:	12" die-casting aluminum RAL9007 grey power coated. T=60-80 μm Adhesion of ISO class 1/ASTM class 4B
Front ring:	304" stainless steel
Lens:	optical lens, efficiency $\geq 85\%$
Glass:	step tempered glass T=8mm
Loading capacity:	exert force area of $\varnothing 10=510\text{kgs}$ $\varnothing 30=840\text{kg}$ $\varnothing 60=1760\text{kg}$
Waterproof cable gland:	IP68 PG-9PVC
LED:	Emitter type power LED
Operating temperature:	0-40 degree
Driver:	Constant current output Single color LED=1-circuit output RGB 3in1 LED=3-circuit output

