

Imported by Pro Light BG



Inground Light

www.prolightbg.com

Inground Light



Aluminum sleeve
(optional)



Recessed



Buried

Model	Light Source	Beam Angle(°)	Consumption(w)	IP Rating	Weight(kg)	Input Voltage
KP-2AD0301	3x1W	15/ 25/ 45	3.5	67	0.71	24V DC/120/240V
KP-2AD0302	3x3W	15/ 25/ 45	8	67	0.71	24V DC/120/240V

Inground Light



1. Stainless steel trim
2. Die-cast aluminum housing
3. Hi-power LED
4. Power and driver
5. 6 mm tempered glass
6. PG-9 cable gland



Model	Light Source	Beam Angle(°)	Consumption(w)	IP Rating	Weight(kg)	Input Voltage
KP-2AD0303	3x1W RGB	15/25/45	3.5	67	0.71	24VDC
KP-2AD0304	3x3W RGB	15/25/45	8	67	0.71	24VDC
KP-2AD0306	3x3W RGB 3IN1	15/25/45	8.2	67	0.71	24VDC




Model Number: **AL-2A02**

LED: 1×1W 45°
Consumption: 1.7W
Input Voltage: 12/24VDC

Model Number: **AL-2A04**

LED: 1×3W 45°
Consumption: 3.3W
Input Voltage: 12/24VDC

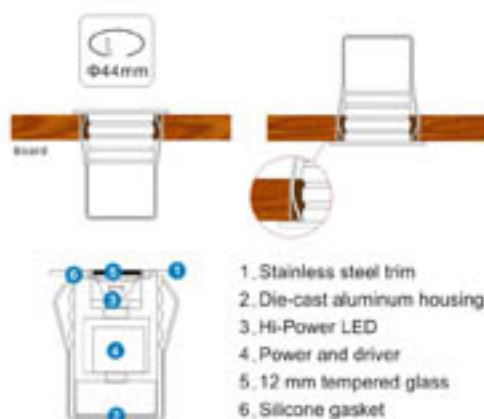

Model Number: **AL-2A07**

LED: 1×3W RGB 3in1 45°
Consumption: 3.7W
Input Voltage: 12/24VDC




Model Number: **AL-2A05**

LED: 1×1W 45°
Consumption: 1.7W
Input Voltage: 12/24VDC

Model Number: **AL-2A06**

LED: 1×3W 45°
Consumption: 3.3W
Input Voltage: 12/24VDC

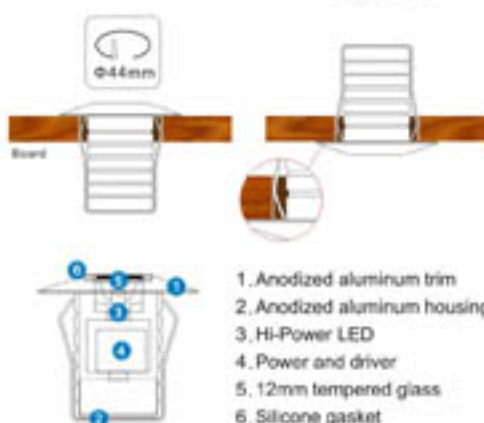

Model Number: **AL-2A08**

LED: 1×3W RGB 3in1 45°
Consumption: 3.7W
Input Voltage: 12/24VDC






Model Number: **AL-2C01**
 LED: $\Phi 5 \times 6$ 60°
 Consumption: 0.4W
 Input Voltage: 12VDC 120/240VAC



Model Number: **AL-2C02**
 LED: $\Phi 5 \times 6$ 60°
 Consumption: 0.4W
 Input Voltage: 12VDC 120/240VAC



Buried



Plastic sleeve



Recessed



1. Stainless steel trim
2. Die-cast aluminum housing
3. Super bright LED
4. Power and driver
5. 12 mm tempered glass
6. PG-9 cable gland

Model Number: **AL-2C03**

LED: 1×1W 25°

Consumption: 1.7W

Input Voltage: 12/24VDC

Model Number: **AL-2C05**

LED: 1×3W 25°

Consumption: 3.3W

Input Voltage: 12/24VDC



Model Number: **AL-2C07**

LED: 1×3W RGB 3in1 25°

Consumption: 3.7W

Input Voltage: 12/24VDC



Model Number: **AL-2C04**

LED: 1×1W 25°

Consumption: 1.7W

Input Voltage: 12/24VDC

Model Number: **AL-2C06**

LED: 1×3W 25°

Consumption: 3.3W

Input Voltage: 12/24VDC



Model Number: **AL-2C08**

LED: 1×3W RGB 3in1 25°

Consumption: 3.7W

Input Voltage: 12/24VDC

